


INTRODUCING [®]

PRIME

BY Prestone

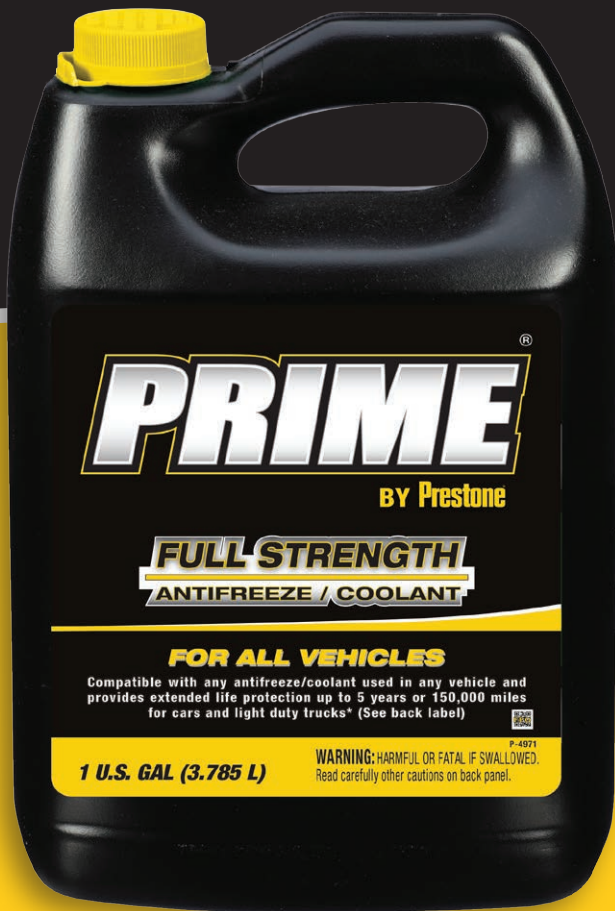

Prime[®] All Makes All Models

**CONCENTRATE UNIVERSAL
EXTENDED LIFE
UP TO 5 YEARS / 150,000 MILES***

PRODUCT	AF3000
ITEM UPC	7 97496-87176 3
DRUM	AF3055
TOTE	AF3000-1KL
BULK	AF3000BULK
CASE UPC	7 97496-87177 0

Prime[®] All Makes All Models

**50/50 PREDILUTED UNIVERSAL
EXTENDED LIFE
UP TO 5 YEARS / 150,000 MILES***

PRODUCT	AF3100
ITEM UPC	7 97496-87178 7
DRUM	AF3155
TOTE	AF3100-1KL
BULK	AF3100BULK
CASE UPC	7 97496-87179 4

PRIME[®]

BY Prestone

CONCENTRATE UNIVERSAL EXTENDED LIFE

GENERAL DESCRIPTION

Composition by Weight	Typical Values	
Inhibited Glycols:	98.0%	
Total Water:	2.0%	
Dyes:	Trace	

Properties	Typical Values	Tests
Color:	Yellow	
Odor:	Characteristic	
Ash Content:	1.20%	ASTM D1119
pH: (50% by Vol. Solution)	8.7	ASTM D1287
Reserve Alkalinity:	5.15	ASTM D1121
Specific Gravity at 20/20°C: (50% by Vol. Solution)	1.0687	ASTM D1122
Freezing Point (50% by Vol. Solution):	-34°F	ASTM D1177
Boiling Point**: (50% by Vol. Solution)	+226°F	ASTM D1120
Foam Test:	50 ml max, 1.0 sec. max break time	ASTM D1881

**Under standard pressure

50/50 PREDILUTED UNIVERSAL EXTENDED LIFE

GENERAL DESCRIPTION

Composition by Weight	Typical Values	
Antifreeze/Coolant Concentrate:	51.0%	
Total Water:	49.0%	
Dyes:	Trace	

Properties	Typical Values	Tests
Color:	Yellow	
Odor:	Characteristic	
Ash Content:	0.58%	ASTM D1119
pH:	8.7	ASTM D1287
Reserve Alkalinity:	2.6	ASTM D1121
Specific Gravity at 20/20°C:	1.0687	ASTM D1122
Freezing Point:	-34°F	ASTM D1177
Boiling Point**:	+226°F	ASTM D1120
Foam Test:	50 ml max, 1.0 sec. max break time	ASTM D1881

**Under standard pressure

PROTECTION	FREEZE-UP PROTECTION	BOIL-OVER PROTECTION†	CORROSION PROTECTION
MINIMUM 50% Antifreeze 50% Water	-34°F	+265°F	Meets or exceeds ASTM D3306 ASTM D4985
MAXIMUM 70% Antifreeze 30% Water	-84°F	+276°F	

† Using a 15 lb. pressure cap in good condition

PROTECTION	FREEZE-UP PROTECTION	BOIL-OVER PROTECTION†	CORROSION PROTECTION
50/50 PREDILUTED Antifreeze/Coolant	-34°F	+265°F	Meets or exceeds ASTM D3306 ASTM D4985

† Using a 15 lb. pressure cap in good condition

UPC Item



UPC Case



50/50 - UPC Item



50/50 - UPC Case



Case Pack:	Case Size (in.):	Case Weight (lb.):	Case Cube (cu ft.):	Pallet Load Size (in.):	Cases Per Tier:	Tiers Per Pallet:	Cases Per Pallet:	Load Weight (lb.):
6	L 15.75 x W 12.94 x H 12.19	60	1.437721615	L 47.25 x W 38.81 x H 48.75	9	4	36	2150

* Provides extended life protection for up to 5 years or 150,000 miles when flushed and filled according to manufacturer's recommendations.